



VALVE IDENTIFICATION GUIDE

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
	Hunter ICV-G 50mm 25 mm, 40 mm , 50 mm, and 80 mm Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.	25
	Watts LF909M1 50mm Lead Free Reduced Pressure Backflow Preventer.	1
A2C-75D-SS	Hunter A2C-75D-SS 75-Station Decoder controller in a stainless steel wall mount enclosure.	1
	Water Meter 50mm	1
	Irrigation Lateral Line: PVC Class 200 SDR 21 32	36.6 m
	Irrigation Lateral Line: PVC Class 200 SDR 21 50	654.6 m
	Irrigation Lateral Line: PVC Class 200 SDR 21 80	603.9 m
	Irrigation Lateral Line: PVC Class 200 SDR 21 100	605.2 m
	Irrigation Mainline: PVC Class 315 SDR 13.5 80	204.9 m
	Irrigation Mainline: PVC Class 315 SDR 13.5 100	346.2 m
	Irrigation Mainline: PVC Class 315 SDR 13.5 150	20.2 m



IRRIGATION LEGEND

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	kPa	l/min
	Hunter I-50-06-SS Turf Rotor, 15 cm Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 25 mm Female NPT Inlet Threads, Standard Nozzle.	28	551.6	104.9
	Hunter I-50-06-SS-ON Turf Rotor, 15 cm Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 25 mm Female NPT Inlet Threads, Dual Opposing Nozzle.	4	551.6	58.7
	Hunter I-50-06-SS-ON Turf Rotor, 15 cm Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 25 mm Female NPT Inlet Threads, Dual Opposing Nozzle.	44	551.6	117.0

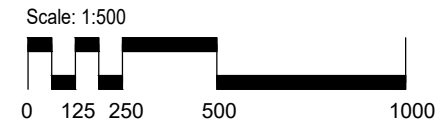

Hunter Industries offers this plan as a general guide for estimating purposes and offers no indemnity, expressed or implied, for projects installed from this plan. Consult a qualified irrigation designer to account for system and site variables.

TECHNICAL ASSISTANCE
1-800-319-4796
WWW.HUNTERINDUSTRIES.COM



AUSTRALIAN FOOTBALL FIELD (METRIC)
I-50 ROTOR
NON-LOOPED MAIN LINE LAYOUT

HUNTER INDUSTRIES
1940 DIAMOND STREET
SAN MARCOS, CALIFORNIA 92078

SHEET
1 of 2