



**POLOCROSSE FIELD 146 x 55 (METRIC)**



I-50 ROTOR  
LOOPED MAIN LINE LAYOUT

HUNTER INDUSTRIES  
1940 DIAMOND STREET  
SAN MARCOS, CALIFORNIA 92078

**SHEET**  
1 of 2


**VALVE IDENTIFICATION GUIDE**

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY
	Hunter ICV-G 50mm 25 mm, 40 mm, 50 mm, and 80 mm Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.	14
	Hunter A2C-75D-SS 75-Station Decoder controller in a stainless steel wall mount enclosure.	1
	Water Meter 50mm	1
	Irrigation Lateral Line: PVC Class 200 SDR 21 50	1,394 m
	Irrigation Lateral Line: PVC Class 200 SDR 21 65	947.4 m
	Irrigation Lateral Line: PVC Class 200 SDR 21 80	662.6 m
	Irrigation Lateral Line: PVC Class 200 SDR 21 100	237.3 m
	Irrigation Mainline: PVC Schedule 40 80	1,390 m
	Irrigation Mainline: PVC Schedule 40 100	226.7 m

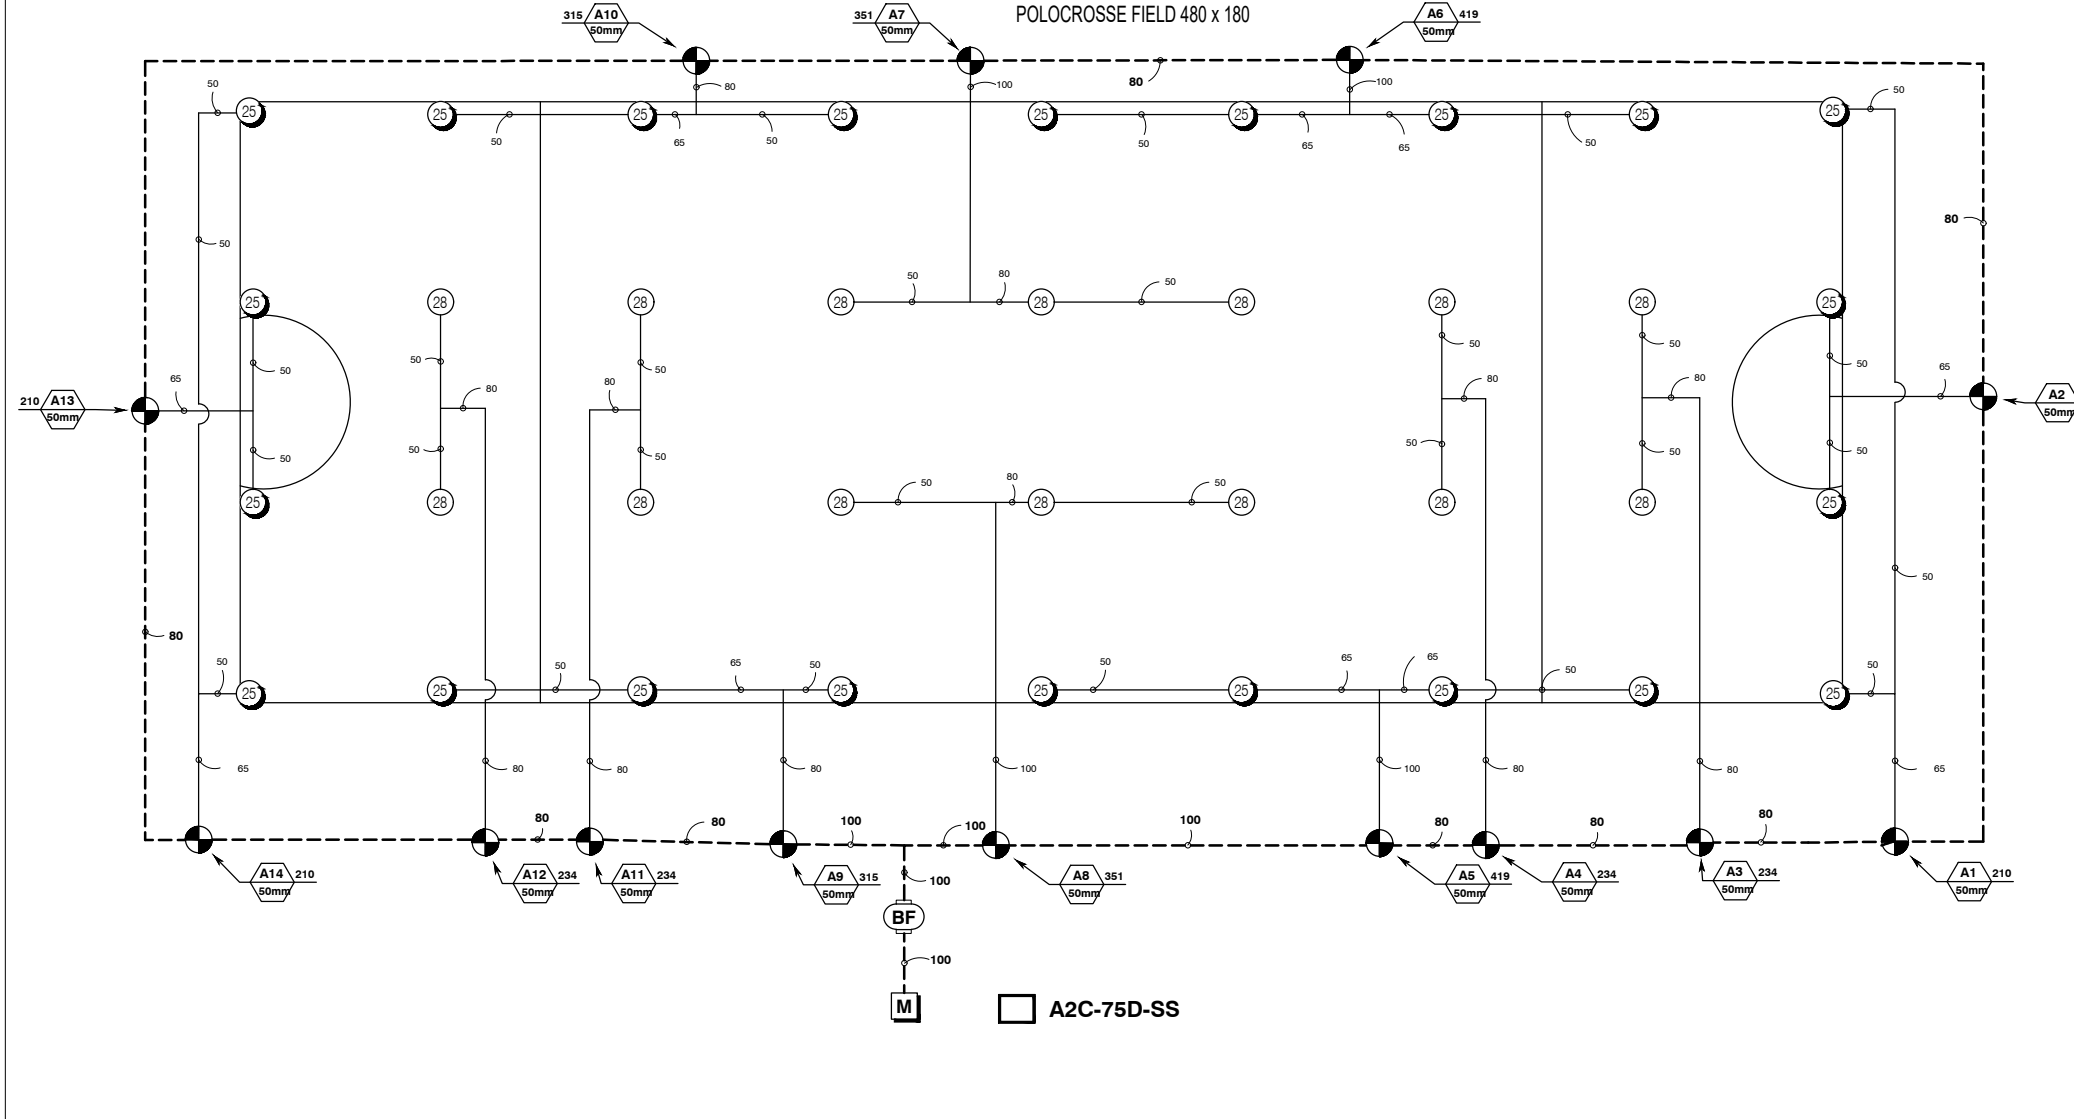

**IRRIGATION LEGEND**

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	kPa	l/min
	Hunter I-50-06-SS Turf Rotor, 15 cm Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 25 mm Female NPT Inlet Threads, Standard Nozzle.	22	551.6	104.9
	Hunter I-50-06-SS-ON Turf Rotor, 15 cm Pop-Up. Adjustable to Full Circle. Drain Check Valve, Stainless Steel Riser, 25 mm Female NPT Inlet Threads, Dual Opposing Nozzle.	14	551.6	117.0

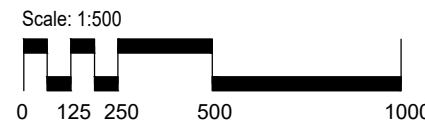

TECHNICAL ASSISTANCE  
1-800-319-4796  
WWW.HUNTERINDUSTRIES.COM

Hunter Industries offers this plan as a general guide for estimating purposes and offers no indemnity, expressed or implied, for projects installed from this plan. Consult a qualified irrigation designer to account for system and site variables.