



# VALVE IDENTIFICATION GUIDE

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	PSI	GPM	RADIUS	DETAIL
25	Hunter I-50-06-SS Turf Rotor, 6.0" Pop-Up, Adjustable to Full Circle, Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Standard Nozzle.	8	80	27.7	64"	
28	Hunter I-50-06-SS-ON Turf Rotor, 6.0" Pop-Up, Adjustable to Full Circle, Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Dual Opposing Nozzle.	1	80	30.9	66"	
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY				
ICV	Hunter ICV-G 1-1/2", 1", 1-1/2", 2", and 3" Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.	1				
ICV	Hunter ICV-G 2", 1", 1-1/2", 2", and 3" Plastic Electric Remote Control Valves, Globe Configuration, with NPT Threaded Inlet/Outlet, for Commercial/Municipal Use.	4				
BF	Watts LF900M1 2" Lead Free Reduced Pressure Backflow Preventer.	1				
A2C-75D-SS	Hunter A2C-75D-SS 75-Station Decoder controller in a stainless steel wall mount enclosure.	1				
M	Water Meter 2"	1				
	Irrigation Lateral Line: PVC Class 200 SDR 21 1 1/2"	115.0 l.f.				
	Irrigation Lateral Line: PVC Class 200 SDR 21 2"	443.5 l.f.				
	Irrigation Lateral Line: PVC Class 200 SDR 21 3"	44.5 l.f.				
	Irrigation Mainline: PVC Class 315 SDR 13.5 3"	227.8 l.f.				




# IRRIGATION LEGEND

SYMBOL	MANUFACTURER/MODEL/DESCRIPTION	QTY	PSI	GPM
25	Hunter I-50-06-SS Turf Rotor, 6.0" Pop-Up, Adjustable to Full Circle, Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Standard Nozzle.	8	80	27.7
28	Hunter I-50-06-SS-ON Turf Rotor, 6.0" Pop-Up, Adjustable to Full Circle, Drain Check Valve, Stainless Steel Riser, 1" Female NPT Inlet Threads, Dual Opposing Nozzle.	1	80	30.9

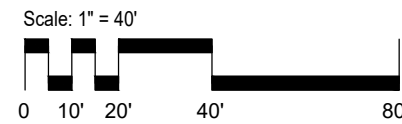

TECHNICAL ASSISTANCE  
1-800-319-4796  
WWW.HUNTERINDUSTRIES.COM

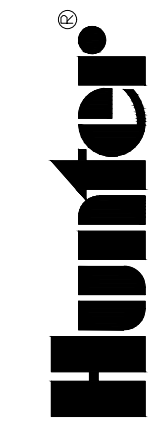

GRASS TENNIS 120 x 108

I-50 ROTOR  
NON-LOOPED MAIN LINE LAYOUT

HUNTER INDUSTRIES  
1940 DIAMOND STREET  
SAN MARCOS, CALIFORNIA 92078

SHEET  
1 of 2